
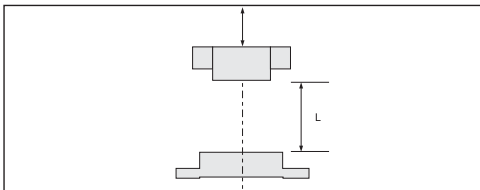


PS-2186

- 防尘防滴构造
Dustproof and waterproof
- 适用于自动售货机的商品
检知
Recommended for
vending machine applications


PS-2186

规格 Specifications


项目 Item	PS-2186
接点形式 Contact Form	NO
最大开关容量 Contact Rating	10W
最大开关电压 Switching Voltage	DC 200V
最大开关电流 Switching Current	0.5A
接点耐压 Breakdown Voltage	DC 250V
接触阻抗 Contact Resistance	0.3Ω以下
电气的寿命 Electrical Life (resistive loads)	10 ⁶ 次 (DC 6V, 10mA, R负荷)
耐冲击性 Maximum Shock	30G
耐震动性 Maximum Vibration	全振幅1.52mm、振动周波数10~55Hz All amplitude 1.52 mm, vibration frequency number 10 ~ 0.55 Hz
使用温度范围 Operating Temp.	-13°C~+70°C

动作特性 Operating Characteristics



PS-1580	L=mm
使用磁铁	PS-2001
ON距离(mm)	MIN
OFF距离(mm)	MAX

PS-3850·3570·3529·3251


- 小型、通用性、
树脂封装规格
General Purpose
(Completely sealed)
- 高温对应类型(PS-3529)
High temperature applications


PS-3850·3570·3529·3251

※PS-3251 电线引出口为反向


规格 Specifications

项目 Item	PS-3850	PS-3570	PS-3529	PS-3251
接点形式 Contact Form	NO			NC
最大开关容量 Contact Rating	10W		3W	10W
最大开关电压 Switching Voltage	DC 200V		DC 100V	DC 250V
最大开关电流 Switching Current	0.5A		0.2A	
接点耐压 Breakdown Voltage	DC 200V			DC 250V
接触阻抗 Contact Resistance	0.3Ω以下 0.3ΩMax.			
电气的寿命 Electrical Life (resistive loads)	10 ⁶ 次 (DC 100V, 10mA, R负荷)			10 ⁷ 次 (DC 10V, 5mA, R负荷)
耐冲击性 Maximum Shock	30G			10G
耐震动性 Maximum Vibration	全振幅1.52mm、振动周波数10~55Hz All amplitude 1.52 mm, vibration frequency number 10 ~ 0.55 Hz			
使用温度范围 Operating Temp.	-10°C~+60°C		0°C~+100°C	-10°C~+60°C

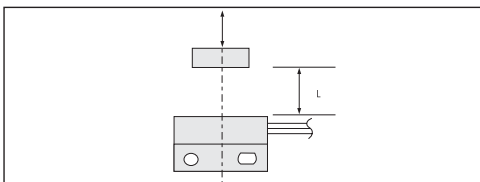动作特性 Operating Characteristics


PS-3850	L=mm	L=mm
使用磁铁	TG-0043	TG-0016
ON距离(mm)	2.5 MIN	6.5 MIN
OFF距离(mm)	7.0 MAX	11.5 MAX

PS-3529	L=mm	L=mm
使用磁铁	TG-0043	TG-0016
ON距离(mm)	2.8 MIN	6.5 MIN
OFF距离(mm)	7.2 MAX	11.5 MAX

PS-3570	L=mm	L=mm
使用磁铁	TG-0043	TG-0016
ON距离(mm)	3 MIN	6.5 MIN
OFF距离(mm)	8 MAX	11.5 MAX

PS-3251	L=mm
使用磁铁	TG-0016
ON距离(mm)	12.0 MAX
OFF距离(mm)	4.5 MIN
再ON距离(mm)	2.5 MAX