

**特点 Features**

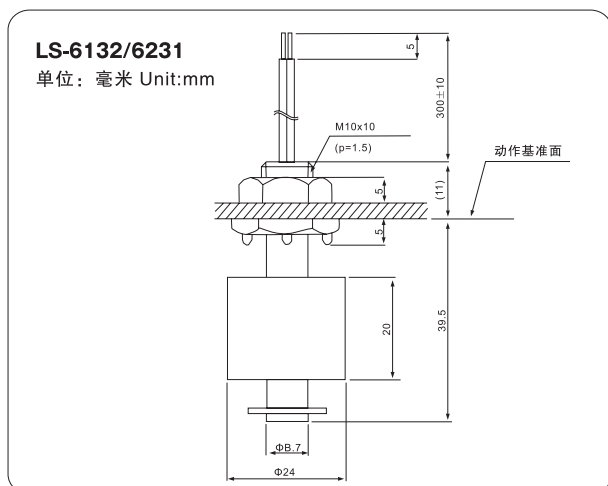
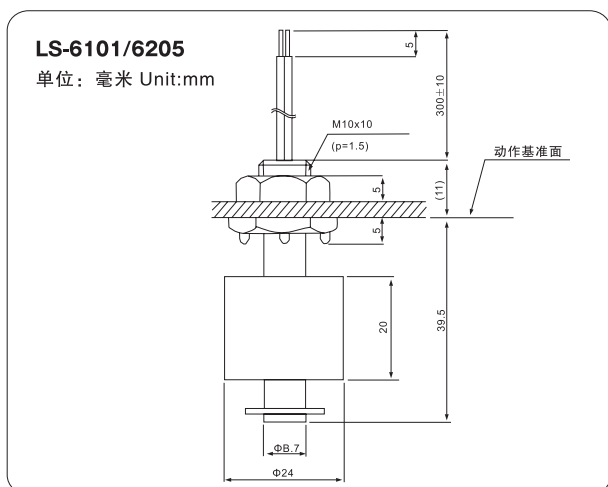
- 树脂外盒 (水用) Resin case (use in water)
- 螺母安装型 Fitted by nut
- 单浮子型 Single float type

**LS-6101/6205**

**LS-6132/6231**

**规格 Specifications**

项目 Item		LS-6101/6205	LS-6132/FS-6231
使用液体 Fluid Applicable		水(1.0) Water(1.0)	
Material 材质	外盒 Case	PP树脂 PP resin	
	浮子 Float	PP树脂 PP resin	
Electrical 特性	最大开关容量 Max. Switching Power	50W	10W
	最大开关电压 Max. Switching Voltage	200V	200V
	最大开关电流 Max. Switching Current	0.6A	0.5A
	接点耐压 (DC) Contact Withstand Voltage	250V	
	接触阻抗 Contact Resistance	0.3Ω max.	
使用温度范围 Operating Temperature		-10~+60℃	

**外形尺寸 Outline Dimensions**

**动作特性 Operating Characteristics**
